





IPP A1 IoT

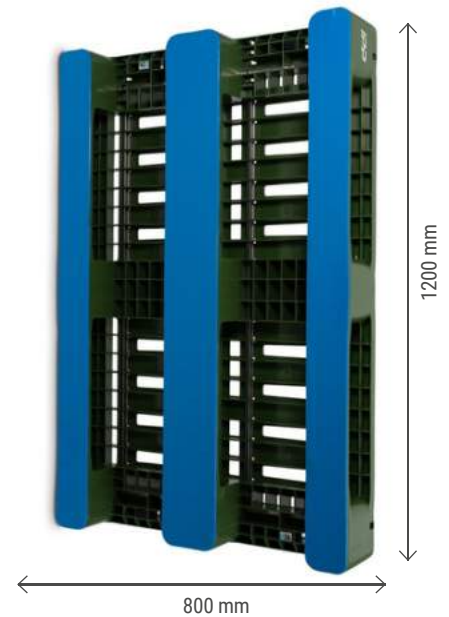

1200 X 800 MM

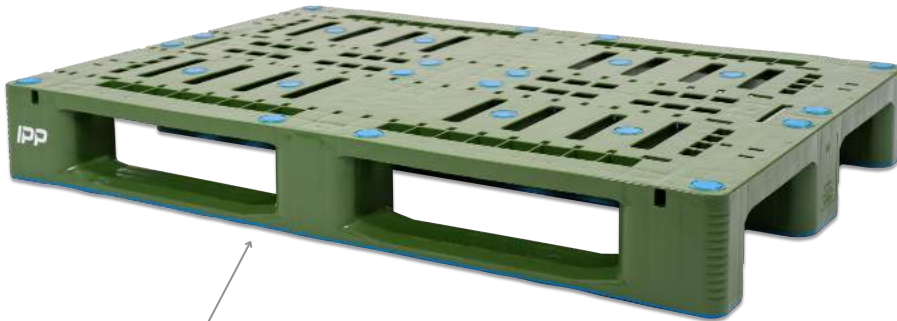

SPEZIFICATIONS

CHARACTERISTICS	OWNERSHIP	USAGE
<ul style="list-style-type: none"> • A full Polyethylen (PE) pallet • Tracker/transponder integrated flush underneath • Palgrip® anti-slip runners and pads • Temperature stability: -30 °C to +40 °C, briefly up to 90 °C • 6 stiffening profiles 	<p>IPP pallets always remain the property of IPP, part of Faber Group.</p>	<ul style="list-style-type: none"> • Pharma-Industry • FMCG • Retail
MATERIAL	HEIGHT	WEIGHT
Polyethylene (PE)	150 mm	18,5 kg
LOAD CAPACITY	COLOUR	MARKINGS
<ul style="list-style-type: none"> • Static (on flat surface): 7500 kg • Dynamic (on a forklift): 1250 kg • In racking system (resting on 2 supports): 1250 kg 	Light green/Light blue	IPP Branding on the left block on each long side.

Dimensions subject to allowable manufacturing tolerances. IPP reserves the right to change any of the above information without prior notice.

www.ipp-pooling.com