


A1210

1200 X 1000 MM



The marking on the Heat Treated pallet

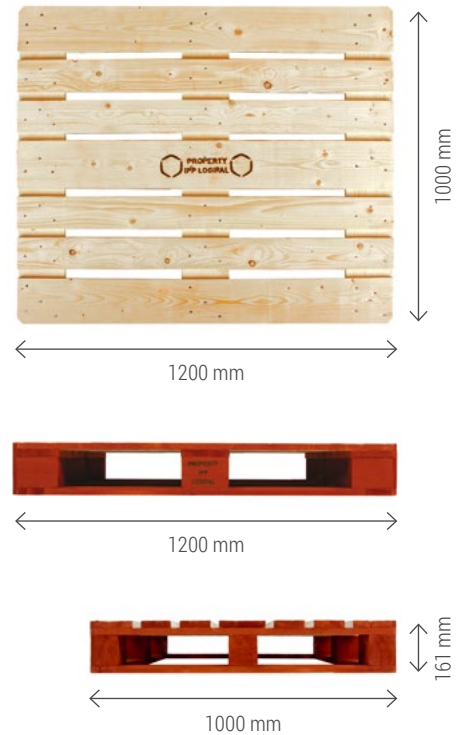

SPECIFICATIONS

CHARACTERISTICS	OWNERSHIP	USAGE
<ul style="list-style-type: none"> • Full perimeter base. • Accepted across retail supply chains. • High quality. • Chamfered corners. • Optionally available as Heat Treated / ISPM15 	IPP pallets always remain the property of IPP, part of Faber Group.	Can be used in a variety of IPP Logipal pooling systems: <ul style="list-style-type: none"> • One-Way Trip • Trade Collect • Daily rental • Trade Direct

MATERIAL	HEIGHT	TOP DECK LENGTH X WIDTH	APERTURE HEIGHT 1000 MM	APERTURE HEIGHT 1200 MM
Controlled range of quality softwood timber.	161 mm	1200 x 1000 mm	95 mm	117 mm

WEIGHT	LOAD CAPACITY	COULEUR	MARKINGS	PAINT
+ / - 29 kg	Rating 1500 kg maximum uniformly distributed & properly racked. Not to exceed 6000 kg when stacking loaded pallets.	Painted in IPP Logipal brick brown.	Property IPP marking at upper deck and middle block. In case of HT/ISPM15: mark on left block.	Water based paint that complies with the relevant European legislation.

Dimensions subject to allowable manufacturing tolerances.
IPP reserves the right to change any of the above information without prior notice.

www.ipp-pooling.com