


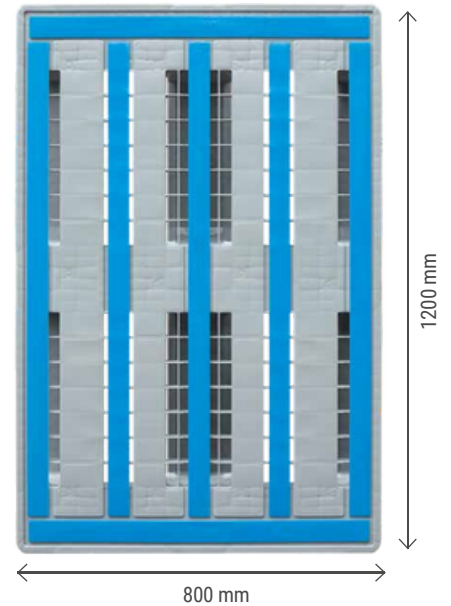


IPP L1

1200 X 800 MM

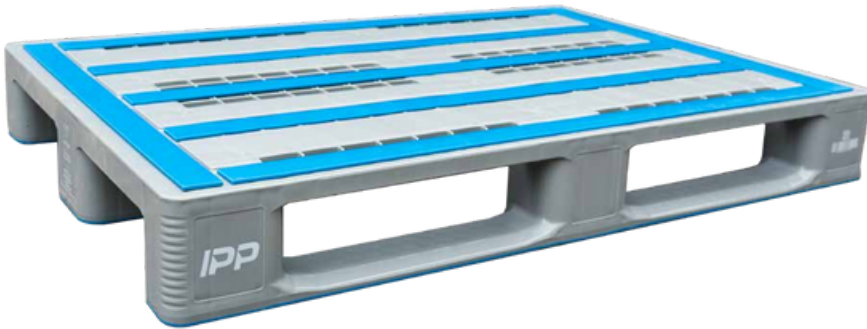

SPEZIFICATIONS

CHARACTERISTICS	OWNERSHIP	USAGE
<ul style="list-style-type: none">• A full Polyethylen (PE) pallet• Multiple options: Rim, Transponder (RFID)• Palgrip® anti-slip runners• Temperature stability: -30 °C to +40 °C, briefly up to 90 °C	IPP pallets always remain the property of IPP, part of Faber Group.	<ul style="list-style-type: none">• Pharma-Industry• FMCG• Retail
MATERIAL	HEIGHT	WEIGHT
Polyethylene (PE)	150 mm	20 kg
LOAD CAPACITY	COLOUR	MARKINGS
<ul style="list-style-type: none">• Static (on flat surface): 7500 kg• Dynamic (on a forklift): 1250 kg• In racking system (resting on 2 supports): 1250 kg	Light Grey/Light blue	IPP Branding on the left block on each long side, Barcodes and RFID Tag on the right block.

Serial recording via GS1 GRAI possible.

Dimensions subject to allowable manufacturing tolerances. IPP reserves the right to change any of the above information without prior notice.

www.ipp-pooling.com