


F608

800 X 600 MM



The marking on the Heat Treated pallet

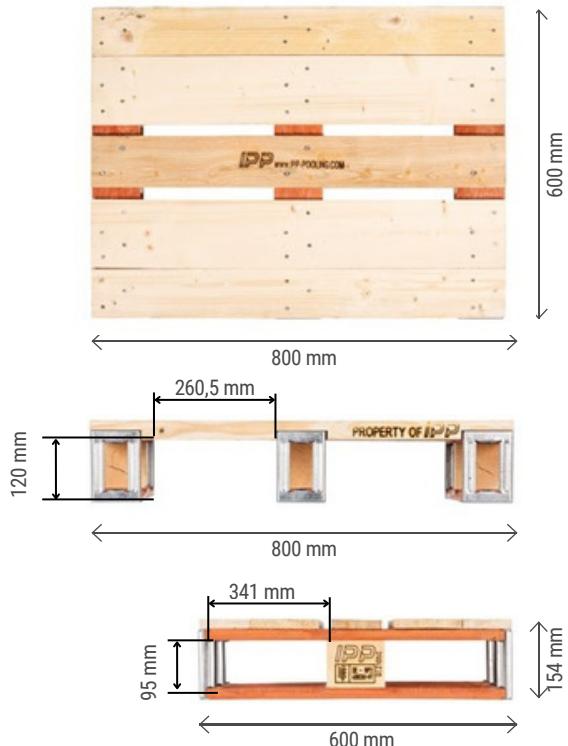

SPECIFICATIONS

CHARACTERISTICS	OWNERSHIP	MARKINGS
<ul style="list-style-type: none">• Robust construction• Ideal for automated conveyor systems• Suitable for high-rack storage systems• Guaranteed secure• Tested by the Fraunhofer Institute• Continuously monitored to ensure high quality	Half pallets always remain the property of IPP, part of Faber Group.	Property IPP marking on the top deck, on the long side on the middle block and on the steel spacers. HT/ISPM15: mark on both outer blocks.

MATERIAL	HEIGHT	TOP DECK	APERTURE HEIGHT 800 MM	APERTURE HEIGHT 600 MM
Controlled selection of high-quality timber and steel.	154 mm	800 x 600 mm	120 mm	95 mm

WEIGHT	LOAD CAPACITY	COLOUR	PAINT
+/- 11 kg	750 kg	Painted in IPP brick brown.	Water based paint that complies with the relevant European legislation.

Dimensions subject to allowable manufacturing tolerances. IPP reserves the right to change any of the above information without prior notice.

www.ipp-pooling.com